



# COMMERCIAL THERMOGUARD™



# CHOOSE YOUR OPTIONS

## SPECIFICATIONS

	3-Inch ThermoGuard™	2-Inch ThermoGuard™
<b>U-Factor</b> R-Value	<b>0.11</b> 26.0 	<b>0.14</b> 18.0 
Foam/Insulate	Polyurethane	Polyurethane
Thickness	3 inches	2 inches
Maximum Width	40 ft. 2 In.	32 ft. 2 in.
Exterior Steel	27 gauge <i>20 gauge upgrade, white only</i>	27 gauge <i>20 gauge upgrade, white only</i>
Interior Steel	27 gauge	27 gauge
Warranty* <i>Excludes Springs</i>	10 years	10 years

\*For full warranty details contact your Midland dealer




## COLORS



Color Select™


\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.

## WINDOWS

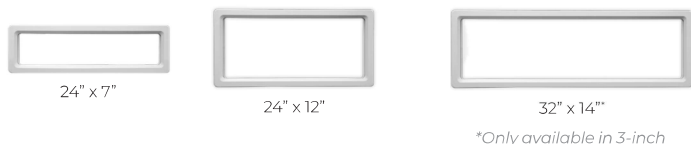

\*Only available in 3-inch

## TRACK MOUNTING




**Reverse Angle Mounted Track**  
Continuous leg-in angle to attach to steel jambs



**Angle Mounted Track**  
Continuous leg-out angle used on larger doors to attach to wood jambs


## TRACK CONFIGURATIONS



**Standard Lift**  
For normal installations




**Inclined Track**  
To follow pitch of roof



**Hi-Lift**  
To put horizontal track as close to ceiling as possible



**Vertical Lift**  
Full vertical rise where headroom is available



**Low Headroom**  
For low-clearance installations

## GLASS



\*Tempered only. All other glass is available in both tempered and untempered.